

## Stainless Sink

### SPECIFICATIONS

#### GENERAL

Sink formed of #23 gauge, nickel bearing stainless steel. Top mount.


#### DESIGN FEATURES

Bowl Depth: 5-1/8".

Coved Corners: 2-1/4" vertical and horizontal radius.

Finish: Exposed surfaces are polished to a buffed satin finish.

Underside: Fully undercoated to dampen sound and prevent condensation.

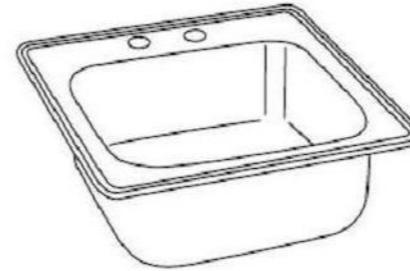

NOTE: Unless otherwise specified, sink is furnished with 2 faucet holes as shown.

These sinks comply with ASME A112.19.3.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

#### SINK DIMENSIONS (INCHES)\*

Overall		Inside Bowl			Cutout in Countertop (1 1/2" Radius Corners)		No. of 1 1/2" or 1 1/2" Dia. Faucet Holes 4" Centers	Minimum Cabinet Size
L	W	L	W	D	L	W		
15	15	12	10	5 1/8	14 3/8	14 3/8	2	18


\* Length is left to right. Width is front to back.

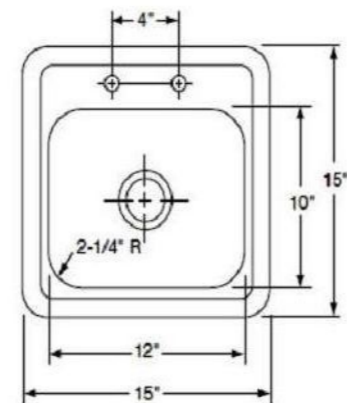

Bowl Depth is 5-1/8"

Model K115152 Illustrated

#### HOLE DRILLING CONFIGURATIONS



ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.